




Diagrams: Fuel System Modification for Nissan Navara

Nissan Navara
D22 2.5 Ltr

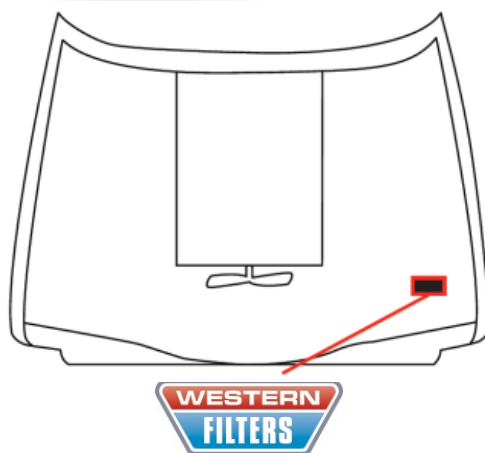

Before Starting

- ☐ Ensure the engine bay is clean and free from contaminants.
- ☐ The Fuel Manager unit has arrows which indicate flow located under the ports.
- ☐ Install all fittings and plugs into the filter assembly using a suitable thread paste such as Permatex Thread Sealant 592914.

Parts List

Parts List

1. Remove hose from the inlet side of the original fuel filter.
2. The Direction Plus mounting bracket fits on to the base of the front passenger side guard. Use the 4 x 6mm bolts and nuts to secure this bracket to the guard.
3. Install the brass quick fittings to the left hand side of the Fuel Manager and the plugs on the right using a sealing past such as Threebond 1110b.
4. Mount the Fuel Manager to the bracket.
5. Insert one of the plastic quick fittings into the fuel hose using one of the hose clamps provided and clip to the inlet of the Fuel Manager, run the other end of that hose to the outlet from the tank.
6. Connect the fuel hose to the outlet of the Fuel Manager using a hose clamp and the other quick fitting. Connect the end of this hose to the inlet of the original fuel filter housing.
7. Ensure all fuel lines are correctly secured with no kinks.
8. Pump the hand primer until it goes firm, the fuel system is now bled and the engine is ready to start.
9. Check whole system for leaks.

Parts List

1. Fuel Manager 30 micron Filtration Unit
2. Mounting Bolts, Washers and Nyloc Nuts
3. Spare 30 Micron Replacement Filter
4. 2m 3/8 Inch Quality Fuel Hose
5. Direction Plus Filter Bracket
6. Brass & Plastic Quick-Fit Fittings
7. Blanking Plugs
8. Hose Clamps
9. 6mm Mounting Bolts



P: (02) 9831-1715 | F: (02) 9671-2212 | E: enquiries@westernfilters.com.au | W: www.westernfilters.net.au
45 Forge St, Blacktown NSW 2148 | Mon-Fri: 7:00am – 5pm / Sat: 7:00am – 12pm

