

T: (02) 9831 1715

WESTERN FILTERS FILTERS FILTERS FILTERS

www.westernfilters.net.au | enquiries@westernfilters.com.au

H H H H H NNAM

Mitsubishi Triton 2024 MV 2.4L Bi-Turbo 150kW 470Nm

OS-PROV-53



MANN Provent Catch Can Dual Bracket Kit Install Guide

CAUTION: ** Ensure the engine is OFF & COOL before installation! **

- STEP 1: Identify the Install Area on the passenger's side.
- **STEP 2:** Remove the Factory Bracket housing the Fuel Filter. After detaching the Fuel Line from the bracket, push it to the side, clear of the Install Area.
- STEP 3: To place the Kit Bracket: Hold the Bracket with the Back facing up.
 - Point the Bracket Top Edge (welded bolts) facing towards the front of car.
 - Lower the base in first, then gently turn and push the Bracket into place.
- **STEP 4:** Release the Provent plastic bracket. Swivel the Ports in to position. Lock in the plastic bracket once more.
- **STEP 5:** Push the Drain Hose onto the Provent base draining port and clamp tightly.
- **STEP 6:** Feed the Drain Hose down thru the engBay into the wheel arch. Cut to length, insert the Tap (closed position). Secure with clamps.
- STEP 7: Remove the Provent Lid to fit. Refit the Factory Bracket. Now return Lid.







45-47 Forge St, Blacktown NSW 2148 | MON to FRI: 7:30am-5:00pm | SAT: 7:30am-12:00pm









WESTERN FILTERS

Mitsubishi Triton 2024 MV 2.4L Bi-Turbo 150kW 470Nm

OS-PROV-53

STEP 8: Secure Drain Hose within wheel arch with P-Clamp.

STEP 9a: Remove Factory Air Hose from between Air Intake and Crankcase.

STEP 9b: Connect the Longer Hose to the Provent Lower Outlet.

STEP 9b: Connect other end to the Air Intake. Secure all.

STEP 10a: Air Hose after removal (Air Intake and Crankcase Ports).

STEP 10b: Connect the 'J-Shaped' Hose from the Provent Top Inlet.

STEP 10c: Connect the other end to the Crankcase. Secure all.

STEP 11: Kit is now in place.


STEP 12: Flip Engine Cover and Remove Foam Pack.

STEP 13: Return Engine Cover - Kit Installation complete.

** Maintenance Reminder : Drain the oil catch can monthly !
Replace the element every 40,000 kms **

View Video Slide Presentation: SCAN QR-CODE on Pg1.



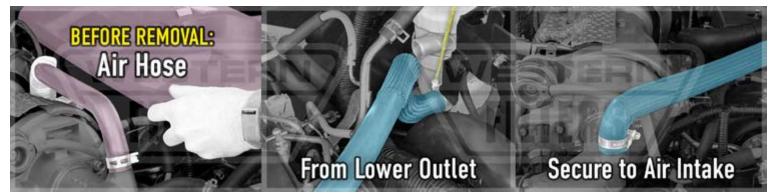

STEP 9a: STEP 9b: STEP 9c:



STEP 10a: STEP 10b: STEP 10c:



STEP 11: STEP 12: STEP 13:

45-47 Forge St, Blacktown NSW 2148 | MON to FRI: 7:30am-5:00pm | SAT: 7:30am-12:00pm









